

TS-A6960F 6" x 9" 4-Way Coaxial Speaker System




- · Powerful and well controlled bass
- · High sensitivity and wide dynamic range
- Natural and clear vocals





- Twin polyethylene terephthalate (PET) hard dome tweeters
 - · Ilmm tweeter
 - 18mm tweeter
- 2-1/4" cellulose fiber cone midrange
- 6" x 9" carbon and mica reinforced Injection Molded Polypropylene (IMPP) cone construction
- Included multi-fit installation adapter to optimize fitment in applicable original equipment (OE) speaker locations

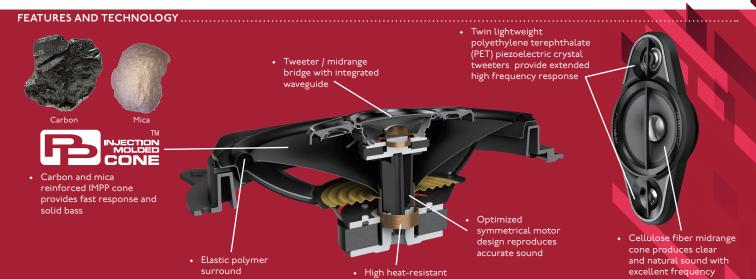


wire voice coil

EASILY UPGRADE TO HIGH PERFORMANCE



Upgrade Your Sound

- OPEN & SMOOTH™ delivers smooth frequency response and an expansive soundstage
- Clear high frequencies
- Deep, rich bass
- Low distortion, even at high output

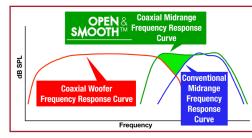

Pioneer's OPEN & SMOOTH sound concept provides a seamless and smooth transition between the woofer and midrange / tweeter drivers and delivers uniform off-axis frequency response optimized for automotive applications where one or more speakers are often aimed away from the listeners ears.

response characteristics

Easy Installation

• Included 6" x 9" multi-fit installation adapters expand installation flexibility and improve acoustic performance



Included multi-fit installation adapters



Compatibility Examples¹

MAKE	MODEL	
CHEVROLET	SILVERADO / TAHOE	
Dodge	RAM1500	
FORD	F-150	
Jeep	CHEROKEE	
TOYOTA	CAMRY / TACOMA	


Pioneer Installation Fit Guide

For more information about speaker and adapter compatibility, scan this QR code or visit:

http://www.pioneer-carglobal.com/speakerfitting



Dimensions

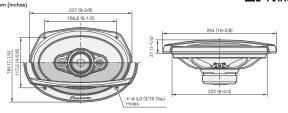













Pioneer A-series 6" x 9" Coaxial Speaker Systems	TS-A6960F	TS-A6970F (also available)	TS-A6990F (also available)
System Type	4-way Coaxial	5-way Coaxial	5-way Coaxial
Sound Pressure Level (Sensitivity)	89dB (± 1.5dB)	89dB (± 1.5dB)	90dB (± 1.5dB)
Frequency Range	35 Hz to 24 kHz	34 Hz to 25 kHz	22 Hz to 25 kHz
Continuous Power Handling (RMS)	90 Watts	I00 Watts	I20 Watts
Maximum Peak Power Handling	450 Watts	600 Watts	700 Watts
Nominal Impedance	4Ω	4Ω	4Ω
Woofer Cone Diameter	6″ x 9″	6″ x 9″	6″ x 9″
Woofer Cone Material	Carbon and mica reinforced IMPP	Carbon and mica reinforced IMPP	Carbon and mica reinforced IMPP
Surround Material	Elastic polymer	Elastic polymer	Elastic polymer
Woofer Magnet Material	Ferrite	Ferrite	Ferrite
Woofer Magnet Weight	II.3 oz	12.7 oz	15.2 oz
Mounting Depth	2-7/8″	2-7/8″	3-3/8″ (Deep basket)
Tweeter / Midrange Type	Ilmm PET dome tweeter 18mm PET dome tweeter 2-I/4" cellulose fiber cone midrange	9mm PET dome super tweeter Ilmm PET dome tweeter I8mm PET dome tweeter 2-I/4 " PEI film cone midrange	9mm PET dome super tweeter Ilmm PET dome tweeter I8mm PET dome tweeter 2-I/4 " PEI film cone midrange
Woofer / Midrange Crossover Frequency	3,600 Hz	4,300 Hz	3,600 Hz
Multi-fit Installation Adapters	Included	Included	N/A

Pioneer A-series full-range speakers available in additional sizes and applications: TS-A6970F, TS-A6990F (6"x 9") • TS-A6880F (6"x 8") • TS-A1670F, TS-A1680F (6-I/2") • TS-A1370F (5-I/4") • TS-A4670F (4"x 6")

MARNING: Over time, your hearing "comfort level" adapts to higher volumes of sound, so that what sounds "normal" can actually be doing harm. To protect against hearing loss, set your equipment's volume at a low setting, slowly increase it until you can hear it comfortably and clearly, and leave it there. Do not turn up the volume so high that you can't hear what's around you.

Information provided for reference only and does not imply guaranteed compatibility with each model year of the vehicles shown. Consult your Authorized Pioneer Dealer to confirm vehicle compatibility.

Protect your investment. Purchase from an Authorized Pioneer Dealer. Only products purchased from an Authorized Pioneer Dealer (or Authorized Pioneer Internet Dealer) qualify for the manufacturer's warranty and manufacturer's rebates. Pioneer Electronics (USA) Inc., Post Office Box 1760, Long Beach, California 90801 Pioneer Customer Service Department: I-800-PIONEER

Note: Specifications, designs, and user interfaces are subject to modification without notice. Product colors and illumination may differ in photographs from actual appearance due to effects of printing and photography.

PIONEER, OPEN & SMOOTH and the Pioneer logo are trademarks or registered trademarks of Pioneer Corporation.

All other brand, product names, or logos are trademarks or registered trademarks of their respective holders.

2018 TS-A6960F- 9/18

©2018 Pioneer Electronics (USA) Inc.

Pioneer Electronics (USA) Inc. proudly supports and encourages you to support the Consumer Technology Association (CTA), Mobile Electronics Certification Program (MECP) for installers and the Specialty Equipment Market Association (SEMA).







CHECK OUT MORE AT PIONEERELECTRONICS.COM/CAR

- FACEBOOK.COM/PIONEERNORTHAMERICA
- INSTAGRAM.COM/PIONEERCARAUDIO
- > TWITTER.COM/PIONEERUSA

